

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
1 March 2001 (01.03.2001)

PCT

(10) International Publication Number
WO 01/13849 A1

(51) International Patent Classification⁷: **A61F 13/15**

(21) International Application Number: **PCT/US00/23091**

(22) International Filing Date: **23 August 2000 (23.08.2000)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:
60/150,258 23 August 1999 (23.08.1999) US
09/637,425 11 August 2000 (11.08.2000) US

(71) Applicant: **KIMBERLY-CLARK WORLDWIDE, INC.** [US/US]; 401 N. Lake Street, Neenah, WI 54956 (US).

(72) Inventors: **FREIBURGER, Sarah, Jane, Marie**; 2708 Welhouse Drive, Kaukauna, WI 54130 (US). **BRUEM-MER-PRESTLEY, Mary, Anne**; 418 East Pershing Street, Appleton, WI 54911 (US). **BORDAIN, Nefetari, Edris**; 5508 Treelodge Parkway, Dunwoody, GA 30350 (US). **SCHMOKER, Suzanne, Marie**; 4212 Brooks Road, Oshkosh, WI 54904 (US). **FELL, David, Arthur**; 2055 Lynn Drive, Neenah, WI 54956 (US).

(74) Agents: **BENDEL, Michael et al.**; Kimberly-Clark Worldwide, Inc., 401 N. Lake St., Neenah, WI 54956 (US).


(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:
— *With international search report.*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **REFASTENABLE ABSORBENT ARTICLE**

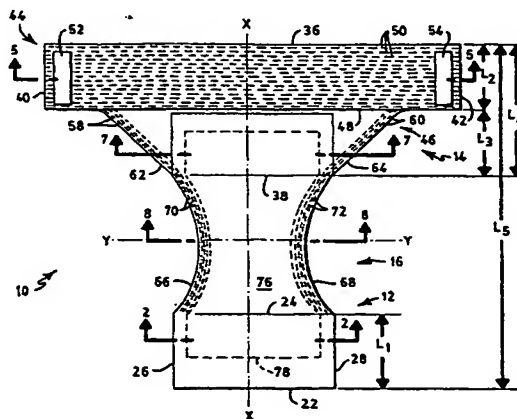

(57) Abstract: A disposable absorbent article is disclosed having a front portion, a back portion and a crotch portion. The crotch portion joins the front portion to the back portion. The back portion has a first end and a second end. The back portion is divided into a first section and a second section. The first section is extendable in a transverse direction and has a length L₂ measured perpendicularly from the first end of the back portion to a line drawn parallel thereto. The second section has a length L₃ measured perpendicularly from the second end of the back portion to the line drawn parallel to the first end. The second section has a first side edge, a second side edge, a first area A₁ and a second area A₂. The first area A₁ represents an area bounded by the first and second side edges, the second end, and the line drawn parallel to the first end. The second area A₂ represents an area bounded by first and second lines, the second end, and the line drawn parallel to the first end. The first and second lines are drawn perpendicular to the second end at points where the first and second side edges intersect the second end. The first and second lines intersect the line drawn parallel to the first end. The second section has a ratio A₁/A₂ which ranges from between about 1.3 to about 3.5.



WO 01/13849 A1

REFASTENABLE ABSORBENT ARTICLE

FIELD OF THE INVENTION

5 This invention relates to an absorbent article having a refastenable mechanism. More specifically, this invention relates to a disposable absorbent article having a refastenable mechanism that improves body fit and reduces the likelihood of fluid leakage.

BACKGROUND OF THE INVENTION

10 Today, various disposable absorbent articles exist which are designed to absorb and retain body fluid and/or excrement. Examples of such articles include incontinence products such as pants, briefs and undergarments, baby diapers, feminine care menstrual pants, training pants, etc. While most of these articles perform satisfactorily for their
15 intended purpose, some are difficult to remove from the body of the wearer. Many do not have a refastenable mechanism that allows the article to be easily adjusted during use or be easily removed from the wearer's body before the product is permanently discarded while maintaining an underwear like fit. Some of today's commercially available products
20 do not conform well to the human body and this poor fit increases the likelihood of fluid leakage while the product is being worn. Therefore, there remains a need for a disposable absorbent article having a refastenable mechanism that will provide improved fit to the human body and reduce the likelihood of fluid leakage.

 Now, a disposable absorbent article has been invented which has a refastenable mechanism that improves body fit and reduces the likelihood of fluid leakage.

25

SUMMARY OF THE INVENTION

 Briefly, this invention relates to an absorbent article having a refastenable mechanism. The absorbent article has a front portion, a back portion and a crotch
30 portion. The crotch portion connects the front portion to the back portion. The back portion has a first end, a second end and first and second side edges. The back portion is divided into a first section and a second section. The first section is extendable in at least one direction and has a length L_2 measured perpendicularly from the first end of the back portion to a line drawn parallel thereto. The second section has a length L_3 measured
35 perpendicularly from the second end of the back portion to the line drawn parallel to the first end whereby a ratio L_2/L_3 is established which ranges from between about 0.1 to

about 2. First and second fasteners are positioned adjacent to one of the first and second side edges of the back portion and are secured thereto. The absorbent article further includes an absorbent secured to at least one of said front, back or crotch portions. Each of the first and second fasteners are releasably attached to the front portion to form a
5 pant-like article having a waist opening and a pair of leg openings.

The general object of this invention is to provide an absorbent article having a refastenable mechanism. A more specific object of this invention is to provide a disposable absorbent article having a refastenable mechanism that improves body fit and reduces the likelihood of fluid leakage.

10 Another object of this invention is to provide an absorbent article having a refastenable mechanism that is easy to manufacture, is relatively inexpensive and is easy to use.

Still another object of this invention is to provide an absorbent article that can easily be adjusted to conform to a wearer's body.

15 Other objects and advantages of the present invention will become more apparent to those skilled in the art in view of the following description and the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

20 Fig. 1 is a top plane view of an absorbent article having a refastenable mechanism and shown in a pre-assembled flat configuration.

Fig. 2 is a cross-sectional view of Figure 1 taken along line 2—2.

25 Fig. 3 is a bottom view of an absorbent article showing an alternative embodiment for the fastening mechanism on the front portion.

Fig. 4 is a cross-sectional view of Figure 3 taken along line 4—4.

Fig. 5 is a cross-sectional view of Figure 1 taken along the line 5—5.

Fig. 6 is a top view of a portion of the left side of said back portion showing an alternative fastener.

30 Fig. 7 is a cross-sectional view of Figure 1 taken along the line 7—7.

Fig. 8 is a cross-sectional view of Figure 1 taken along the line 8—8.

Fig. 9 is a top view of an alternative absorbent assembly.

Fig. 10 is a cross-sectional view of Figure 9 taken along line 10—10.

35 Fig. 11 is a perspective view of the "in use" configuration of the absorbent article shown in Figure 1 once the first and second lateral section and the back portion are secured together.

Fig. 12 is a top view of the back portion of the absorbent article shown in Fig. 1 with the elastic removed for clarity and showing one way to measure a ratio A_1/A_2 for the second section in order to obtain improved body fit.

Fig. 13 is a top view of the back portion and crotch portion of the absorbent article shown in Fig. 1 with the elastic removed for clarity and showing an alternative way to measure a ratio A_3/A_4 for the second section in order to obtain improved body fit.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to Figs. 1 and 2, a disposable absorbent article 10 having a refastenable mechanism is shown. The absorbent article 10 has a longitudinal central axis X—X, a transverse central axis Y—Y and a vertical central axis Z—Z. The absorbent article 10 includes a front portion 12, a back portion 14 and a crotch portion 16. The crotch portion 16 connects the front portion 12 to the back portion 14. The front, back and crotch portions 12, 14 and 16 can be formed from a single piece of material or from two or more pieces of material. Each of the front, back and crotch portions 12, 14 and 16 can be a single layer of material or each can be formed as a laminate having two or more layers. In Fig. 2, the front portion 12 is shown as a laminate having an upper layer 18 and a lower exterior layer 20. Preferably, the front, back and crotch portions 12, 14 and 16, respectively, are formed as a laminate having two layers.

When a laminate is utilized, the upper layer 18 faces toward the body of the wearer in use and can be either liquid permeable or liquid-impermeable. A thermoplastic film can be used to make the upper layer 18 liquid-impermeable. The lower layer 20 faces away from the body of the wearer in use and it too can either be liquid permeable or liquid-impermeable. Preferably, the lower layer 20 is liquid permeable and is formed from a soft material such as a non-woven. Spunbond is a non-woven material manufactured by Kimberly-Clark Corporation that is soft and pliable and functions well as the lower layer 20. It is beneficial to make one of the layers 18 or 20 liquid-impermeable in the crotch portion 16 so as to prevent body fluid absorbed by the absorbent article 10 from exiting.

The front portion 12, which will be aligned around a portion of the front torso of a wearer's body in use, includes a first end 22, a second end 24, a first side edge 26 and a second side edge 28. The front portion 12 can be constructed such that its lower layer 20 is formed from a material that has fastening qualities. For example, the lower layer 20 can be formed from either a hook material or a loop material. The entire front portion 12 can then act as a fastening element and be releasably attached to another member or have another member releasably attached to it. The front portion 12 can also be formed

from other materials that have the ability to releasably attach to another member. The lower layer 20 can be an adhesive layer, a co-adhesive layer or have some other properties that allow it to be releasably fastened to another member.

Referring to Figs. 3 and 4, a bottom view of the absorbent article 10 showing an alternative embodiment for the fastening mechanism on the front portion 12. For ease of understanding, the same numerals will be used in Figs. 3 and 4 as were used in Figs. 1 and 2 except for the use of prime numbers for the front portion 12'. The front portion 12' of the absorbent article 10' is formed as a single layer 30 having a surface 32. The surface 32 faces away from the body of the wearer during use. Secured to the surface 32 is a fastener 34. The fastener 34 can be a separate piece or patch of material or it can include two or more distinct pieces. The fastener 34 is a "releasable fastener" having the ability to fasten onto another member or have another member fasten onto it. A "releasable fastener" is one that will permit two members to be fastened and then unfastened multiple times. A "releasable fastener" differs from a "permanent fastener" in that it does not require the bond to be permanently destroyed once the connection is broken. The fastener 34 can be formed from a hook material or from a loop material. The fastener 34 can also be formed from an adhesive, a co-adhesive or from some other kind of material that will allow for a releasable attachment or connection to occur with another member. The purpose of the fastener 34 will be explained shortly.

Returning again to the Fig. 1, the front portion 12 has a length L_1 . The length L_1 is measured parallel to the longitudinal central axis X—X. The length L_1 should be equal to or greater than about 1 inches (about 2.5 cm).

Referring now to Figs. 1 and 5, the absorbent article 10 also includes the back portion 14 that will contact the back and sides of a wearer's torso in use. The back portion 14 has a first end 36, a second end 38, and first and second side edges 40 and 42, respectively. The back portion 14 is depicted as a laminate, identical to that used to form the front portion 12. The laminate includes the upper layer 18 which faces the body of the wearer during use and the lower exterior layer 20 which faces away from the wearer's body during use. The upper layer 18 can be either liquid permeable or liquid-impermeable. Preferably, the upper layer 18 is liquid permeable.

The back portion 14 is divided into a first section 44 and a second section 46. The first section 44 has a length L_2 measured perpendicularly from the first end 36 to a line 48 drawn parallel thereto. The length L_2 should be equal to or greater than about 2 inches (about 5 cm). Preferably, for an adult size garment, the length L_1 should range from between about 3 inches to about 7 inches (about 7.6 cm to about 18 cm). Most preferably, for an adult size garment, the length L_1 should range from between about

6 inches to about 7 inches (about 15 cm to about 18 cm). The significance of the dimension L_1 will be explained shortly.

The first section 44 of the back portion 14 should be extendable in the transverse direction so that it can easily stretch to accommodate the anatomy of the wearer's torso.

5 The "transverse direction" is a direction parallel to the transverse central axis Y—Y of the absorbent article 10. The first section 44 can also be extendable in the X—X and/or Z—Z directions if desired. The first section 44 can be made to be extendable in a number of ways. One way is to construct the first section 44 into gathers, pleats or undulations such that as one pulls on the first and second side edges 40 and 42, respectively, the first
10 section 44 extends in the transverse direction. Another way to make the first section 44 extendable is to form it from an elastic material, an elastic composite or construct it to contain elastic. The first section 44 could also be formed from a material having elastic properties and characteristics. Preferably, the first section 44 will be able to stretch and retract like a rubber band. The first section 44 should be capable of extending and
15 retracting multiple times. This ability to extend and retract will allow the refastening mechanism of the absorbent article 10 to be adjusted whenever needed by the wearer.

The first section 44 will exhibit elastic properties if it is formed from a material such as "stretch bonded laminate". A "stretch bonded laminate" is a material that can be used to form the first section 44. Stretch bonded laminate is a material manufactured by
20 Kimberly-Clark Corporation having an office at 401 North Lake Street, Neenah, Wisconsin 54956. Other elastic materials or materials exhibiting elastic properties or characteristics can also be used. Such materials are known to those skilled in the art.

Another way of making the first section 44 elastic is to position and bond one or more elongated elastic strands 50 between the upper and lower layers 18 and 20,
25 respectively. By sandwiching multiple elastic strands 50 between the upper and lower layers 18 and 20, one can adjust the amount of stretch imparted into the first section 44. In Fig. 1, multiple elastic strands 50 are shown. There can be from between about 2 to about 100 elastic strands 50 present in the first section 44. Preferably, there are from between about 10 to about 50 elastic strands 50 present in the first section 50. Most
30 preferably, there are from between about 15 to about 25 elastic strands present in the first section 44. The elastic strands 50 can be in the form of elongated strands, ribbons, bands, strips, etc. The cross-sectional configuration of the elastic strands 50 can vary. The cross-section of the elastic strands 50 can be circular, square, rectangular, oval, etc. The elastic strands 50 preferably will extend transversely across the first section 44 from
35 the first side edge 40 to the second side edge 42. The elastic strands 50 function to

cause the first section 44 to securely and snugly contact the back and sides of a wearer's torso and prevent fluid leakage from occurring at or about the waist opening.

As shown in Fig. 1, the elastic strands 50 can be present throughout the entire length L_2 of the first section 44. Likewise, if the first section 44 is made from an elastic material, the elastic material can extend the full length L_2 .

The amount the first section 44 can extend or stretch can vary depending upon the type of disposable absorbent article produced and the size of the person wearing such an article. However, for an incontinence garment designed to be worn by an adult, the first section 44 should be capable of extending in the transverse direction by at least about 25%. Preferably, the first section 44 should be capable of extending in the transverse direction by at least about 50%. More preferably, the first section 44 should be capable of extending in the transverse direction by at least about 75%. Most preferably, the first section 44 should be capable of extending in the transverse direction from between about 75% to about 400%. The first section 44 should also be sized so as to fit around from between about 25% to about 80% of a person's torso when in a non-extended condition. Preferably, the first section 44 should also be sized so as to fit around from between about 30% to about 70% of a person's torso when in a non-extended condition. Most preferably, the first section 44 should also be sized so as to fit around from between about 40% to about 60% of a person's torso when in a non-extended condition. This size dimension for the first section 44 will reduce the need for the material forming it to be stretched to an extreme amount when being fitted around a person's torso.

Referring again to Figs. 1-3, the back portion 14 has a first fastener 52 and a second fastener 54 secured thereto. Each of the first and second fasteners 52 and 54 are positioned adjacent to one of the first and second side edges 40 and 42, respectively.

Each of the first and second fasteners 52 and 54 can be secured by glue, an adhesive, by ultrasonic bonding, by heat, by pressure, by a combination of heat and pressure, by thread, by a mechanical means or by other means known to those skilled in the art. In Figs. 1-3, the first and second fasteners 52 and 54 are depicted as distinctive, discrete members having a rectangular profile. The first and second fasteners 52 and 54 are shown being located slightly inboard of the respective first and second side edges 40 and 42. The size and shape of the first and second fasteners 52 and 54 can vary. Each of the first and second fasteners 52 and 54 is preferably formed of similar material, although each can be made from a different material, if so desired. The first and second fasteners 52 and 54 can be formed from many different types of materials. For example, the first and second fasteners 52 and 54 can be an adhesive, a co-adhesive, a hook material, a loop material, etc. Preferably, the first and second fasteners 52 and 54 are formed from

either a hook material or from a loop material since these materials are readily available and inexpensive.

It should be also be recognized that other types of fastening mechanisms can be used to releasably attach the front and back portions 12 and 14 together. Such other
5 fastening mechanisms can include adhesives, co-adhesives, as well as mechanical fasteners, such as buttons and buttonholes, etc. Those skilled in the art are familiar with the various fastening mechanisms that can be utilized.

The first and second fasteners 52 and 54 are constructed such that they are releasably attachable to the front portion 12 or 12'. For example, at least one of the first
10 and second fasteners 52 and 54 can be made from a hook material so that it can be releasably attached to the front portion 12 or 12' that would be formed from a loop material. It is also possible to form at least one of the first and second fasteners 52 and 54 from a loop material so that it can be releasably attached to the front portion 12 or 12' that would be formed from a hook material. The refastening aspect of this invention allows
15 the wearer to easily remove the absorbent article 10 from his or her torso, for example, to go to the bathroom. The refastenable aspect also allows the wearer to release and adjust the fit of the absorbent article 10 against his or her body as required. For example, if the absorbent article 10 appears to be too loose or too tight, the fasteners 52 and 54 can be released and be readjusted.

Referring now to Fig. 6, an alternative embodiment is shown for a fastener 56
20 which is secured to the first side edge 40 of the first section 44. The fastener 56 is shown as a separate piece of material securely bonded to the first side edge 40 so as to extend outward therefrom. A similar fastener 56 would be present on the second side edge 42 of the first section 44. As explained above for the first and second fasteners 52 and 54, the
25 fastener 56 can be formed from a hook material, a loop material or from some other kind of material. The fastener 56 can be elastic or non-elastic. The fastener 56 can vary in size and shape and how it is permanently secured onto the back portion 14. Preferably, the fastener 56 is either a hook or loop material that can be releasably attachable to the front portion 12 or 12'. It should be noted that the entire surface of each of the fasteners
30 56 does not have to be formed from a fastening material. Instead, only a portion of the surface can be the fastening element and the remaining portion of the surface can be formed from a non-fastening material.

Referring now to Figs. 1 and 7, the second section 46 of the back portion 14 has a
length L_3 measured perpendicularly from the second end 38 to the line 48 drawn parallel
35 to the first end 36. The length L_3 should be equal to or greater than about 1 inch (about 2.5 cm). Preferably, for an adult size garment, the length L_3 should range from between

about 3 inches to about 10 inches (about 8 cm to about 25 cm). Most preferably, for an adult size garment, the length L_3 should range from between about 4 inches to about 8 inches (about 10 cm to about 20 cm).

The second section 46 may or may not contain elastic 50 that extends
5 transversely thereacross. By designing and manufacturing the absorbent article 10 to have a ratio L_2/L_3 , which ranges from between about 0.1 to about 2, one can improve the body fit of the disposable absorbent article 10. Preferably, the ratio L_2/L_3 ranges from between about 0.2 to about 1.6, and more preferably, the ratio L_2/L_3 ranges from between about 0.3 to about 1.5. By manufacturing the back portion 14 to this desired ratio, one
10 can also minimize fluid leakage.

The second section 46 has first and second leg elastics 58 and 60 that are aligned adjacent to first and second edges 62 and 64. Preferably, the line 48 will intersect at a point where the first and second edges 62 and 64 meet the first and second edges 40 and 42, respectively. The first and second leg elastics 58 and 60 can include one or more
15 elastic strands, ribbons, bands or strips that are arranged approximately parallel to the first and second edges 62 and 64, respectively. Preferably, there are from between about 1 to about 6 elongated elastic strands making up each leg elastic 58 and 60. Most preferably, each of the leg elastics 58 and 60 contains three elastic strands. The elastic strands can be aligned parallel to one another. For good results, the leg elastics 58 and
20 60 should be positioned inward about 1 inch (about 2.5 cm) from the first and second edges 62 and 64, respectively. More preferably, the leg elastics 58 and 60 should be positioned inward about .75 inches (about 2 cm) from the first and second edges 62 and 64, respectively. Most preferably, the leg elastics 58 and 60 should be positioned inward about .5 inches (about 1.3 cm) from the first and second edges 62 and 64.

25 The side edges 62 and 64 are aligned at an angle to the longitudinal centerline X--X of the absorbent article 10. The cut of the second section is important to obtain the desired fit and functioning of the absorbent article 10. In the planar view of the absorbent article 10, see Figure 1, the majority (at least 51%) of the side edges of the second section form a substantially linear line. Preferably, the side edges are substantially linear for a length of at
30 least about 70% of the length of the second section. The straight section of the side edges should form an acute angle with the longitudinal centerline X--X. More preferably, each linear line forms an angle of from between about 25 degrees and about 89 degrees, most preferably, each linear line forms an angle of from between about 55 degrees to about 87 degrees and even more preferably, between about 61 degrees and 76 degrees.

35 The first and second leg elastics 58 and 60 are shown extending from the line 48 to the second end 38 of the back portion 14. One should note that the exact location of

the line 48 would dictate whether the leg elastics 58 and 60 are completely contained within the second section 46 or if they extend into the first section 44. The first and second leg elastics 58 and 60 can extend out to the first and second side edges 40 and 42 of the first section 44, if desired. The leg elastics 58 and 60 function to gather the material from which the second section 46 is formed at a location adjacent to the leg openings. The leg openings are formed as the first and second fasteners 52 and 54 are releasably attached to the front portion 12 to form a pant-like article. Various types of elastics can be used to form the leg elastics 58 and 60. The leg elastics 58 and 60 should have a tension of from between about 10 grams to about 400 grams. Preferably, the leg elastics 58 and 60 should have a tension of from between about 50 grams to about 220 grams. More preferably, the leg elastics 58 and 60 should have a tension of from between about 80 grams to about 200 grams.

Referring to Figs. 1 and 8, the absorbent article 10 also includes the crotch portion 16. The crotch portion 16 connects the front portion 12 to the back portion 14. As noted above, the front portion 12, back portion 14 and the crotch portion 16 can all be part of a single sheet of material. The crotch portion 16 has a first side edge 66 and a second side edge 68 and can have an hourglass, rectangular, square, oval or some other configuration. Each of the side edges 66 and 68 can be straight and aligned parallel or non-parallel to one another. The side edges 66 and 68 can also be curved, arcuate, irregular, convex or concave in shape. Preferably, the side edges 66 and 68 are arcuate in shape with the narrowest distance between the side edges 66 and 68 occurring along the transverse centerline Y—Y. The crotch portion 16 can be a single layer or a laminate, as depicted. Since the crotch portion 16 acts as a baffle to body fluid that is absorbed by the absorbent article 10, it should be liquid-impermeable. If the crotch portion 16 is a laminate, at least one of the layers forming the laminate should be liquid-impermeable. Polypropylene, polyethylene, or any other thermoplastic material works well as a liquid-impermeable layer. Preferably, the crotch portion 16 is a laminate formed from a layer of thermoplastic film and a layer of non-woven material. The non-woven material can be spunbond. Spunbond is a non-woven material manufactured and commercial sold by Kimberly-Clark Corporation having an office at 401 North Lake Street, Neenah, Wisconsin 54956.

The crotch portion 16 also includes first and second crotch elastics 70 and 72, respectively. The crotch elastics 70 and 72 are located adjacent to the first and second side edges 66 and 68, respectively. The crotch elastics 70 and 72 are preferably contoured to match the profile of the side edges 66 and 68. The crotch elastics 70 and 72 are located inward about 1 inch (about 2.5 cm) of the first and second side edges 66 and

68, respectively. Preferably, the crotch elastics 70 and 72 are located inward about .75 inches (about 2 cm) of the first and second side edges 66 and 68, respectively. More preferably, the crotch elastics 70 and 72 are located inward about .5 inches (about 1.3 cm) of the first and second side edges 66 and 68, respectively.

5 The crotch elastics 70 and 72 should have a tension of from between about 10 grams to about 400 grams. Preferably, the crotch elastics 70 and 72 should have a tension of from between about 50 grams to about 220 grams. More preferably, the crotch elastics 70 and 72 should have a tension of from between about 80 grams to about 200 grams.

10 The crotch elastics 70 and 72 can include one or more elongated elastic strands, ribbons or strips. Preferably, each of said first and second crotch elastics 70 and 72 includes at least two strands of elastics, and more preferably, at least three strands of elastics. The strands of each of the crotch elastics 70 and 72 can be aligned parallel to one another or they can be aligned in a non-parallel relationship, if so desired. A parallel
15 alignment is preferred. The strands of each of the crotch elastics 70 and 72 can be spaced fairly close together, for example, within a millimeter of each other. The exact spacing can be adjusted depending on the size of the article, the width of the crotch portion 16, the strength of the crotch elastics 70 and 72, the material from which the absorbent article 10 is constructed, etc.

20 Referring to Figs. 7 and 8, the crotch elastics 70 and 72 can be positioned and secured between the layers 18 and 20 forming the laminate, similar to that shown in Fig. 7. Alternatively, the crotch elastics 70 and 72 can be adhered to an upper surface 74 of the upper layer 18 of the laminate, see Fig. 8. Preferably, the first and second crotch elastics 70 and 72 are bonded to the upper surface 74 of the upper layer 18 by an
25 adhesive.

Referring again to Figs. 1, 2, 7 and 8, the absorbent article 10 can include a liquid permeable liner 76. The liquid permeable liner 76 is also referred to as a bodyside cover. The liner 76 is not required but the absorbent article 10 will be described as including the liner 76. The liquid permeable liner 76, when present, can be formed from any natural or
30 synthetic material that is liquid permeable. The liquid permeable liner 76 can also be formed from a non-woven material. Spunbond is a good material from which to construct the liquid permeable liner 76.

The bodyside liner 76 can be secured to at least one of the front, back or crotch portions 12, 14 or 16. The bodyside liner 76 is shown being directly attached to the crotch
35 portion 16 in Fig. 8. Alternatively, the bodyside liner 76 can be indirectly attached to the crotch portion 16 via one or more layers. In this case, the intermediate layer would be

secured to at least one of the front, back or crotch portions 12, 14 or 16. For example, the bodyside liner 76 could be secured to a liquid-impermeable baffle, that is then adhesively secured to the crotch portion 16.

5 In Fig. 1, the periphery of the bodyside liner 76 and the periphery of the crotch portion 16 are shown to be coterminous. When the crotch elastics 70 and 72 are positioned on the upper surface 74 of the laminate, see Fig. 8, they can be adhesively secured to the bodyside liner 76 such that they are arranged adjacent to the side edges 66 and 68 of the crotch portion 16.

10 The absorbent article 10 further includes an absorbent 78 positioned below the liquid permeable liner 76. The absorbent 78 can be in direct contact with the upper layer 18 of the crotch portion 16. The absorbent 78 is designed to absorb body fluid, especially urine and can include one or more layers of absorbent material. The layers can be constructed of similar or different materials. Suitable materials for the absorbent 78 include cellulose, wood pulp fluff, rayon, cotton, and meltblown polymers such as
15 polyester, polypropylene or coform. Coform is a meltblown air-formed combination of meltblown polymers such as polypropylene, and absorbent staple fibers such as cellulose. A preferred material is wood pulp fluff, for it is low in cost, relatively easy to form and has great absorbency. It should be noted that if two or more layers are utilized, that it is not necessary that all the layers be formed from the same material or have the same density.

20 The absorbent 78 can also be formed from a composite comprised of a hydrophilic material that can be formed from various natural or synthetic fibers, wood pulp fibers, regenerated cellulose or cotton fibers, or a blend of pulp and other fibers. A preferred material is airlaid tissue.

It is also possible and sometimes advantageous to insert a superabsorbent
25 material into the absorbent 78 so as to increase its ability to absorb a large amount of fluid in relation to its own weight. Typical superabsorbents used in absorbent articles such as incontinence garments and diapers can absorb more than 10 times their weight in body fluid. The superabsorbent material can be inserted as particles, fibers or in sheet form. Hydroxyfunctional polymers have been found to be good superabsorbents for disposable
30 absorbent articles. Such superabsorbents are commercially available from The Dow Chemical Company, Stockhausen, Inc., as well as other companies. Two such superabsorbents are DRYTECH® 2035 M and FAVOR® SXM 880. DRYTECH® is a registered trademark of The Dow Chemical Company having an office at 2030 Dow Center, Midland, Michigan 48642. FAVOR® is a registered trademark of Stockhausen,
35 Inc. having an office at 2401 Doyle Street, Greensboro, North Carolina 27406. The superabsorbent can be a partially neutralized salt of cross-linked copolymers of

polyacrylic acid. Other types of superabsorbent materials known to those skilled in the art can also be used.

Referring now to Figs. 9 and 10, an absorbent assembly 80 is depicted which includes, from top to bottom, a liquid permeable bodyside liner 76, one or more layers of an absorbent 78, one layer being shown, and a liquid-impermeable baffle 82. The liquid-impermeable baffle 82 can be formed from a thin layer of thermoplastic material such as polyethylene or polypropylene. The baffle 82 can also be formed from other kinds of liquid-impermeable material. Preferably, the baffle 82 is formed from a liquid-impermeable film. It should be noted that the baffle 82 could be formed from a laminate wherein at least one of the layers is liquid-impermeable.

In the absorbent assembly 80, the crotch elastics 70 and 72 are sandwiched between the liner 76 and the baffle 82. The crotch elastics 70 and 72 can be held in place by a glue, an adhesive, by ultrasonics, by heat, by pressure, by a combination of heat and pressure, or by some other bonding mechanism known to those skilled in the art. It is also possible to secure the crotch elastics 70 and 72 to the lower or exterior surface of the baffle 82 if desired. For good results, the crotch elastics 70 and 72 should be positioned within about 1 inch (about 2.5 cm) from the respective side edge 66 and 68. More preferably, the crotch elastics 70 and 72 should be positioned within about .75 inches (about 2 cm) from the respective side edge 66 and 68. Most preferably, the crotch elastics 70 and 72 should be positioned within about .5 inches (about 1.3 cm) from the respective side edge 66 and 68.

The absorbent assembly 80 can be placed or positioned on or over the crotch portion 16 of the absorbent article 10 and can be retained in place by an adhesive or some other type of fastener. Since the baffle 82 is liquid-impermeable, the crotch portion 16 would not have to be constructed from a liquid-impermeable material. The absorbent assembly 80 can be either permanently or releasably secured to at least one of the front, back or crotch portions 12, 14 or 16 of the absorbent article 10. Preferably, the absorbent assembly 80 is secured to the crotch portion 16 by an adhesive. Alternatively, the absorbent assembly 80 can actually serve as the front and crotch portions, 12 and 16 respectively, of the absorbent article 10.

Referring now to Figs. 1 and 11, the first and second fasteners 52 and 54 are releasably attached to the front portion 12 to form a pant-like article 84. The pant-like article 84 has a waist-opening 86 and a pair of first and second leg openings 88 and 90. The leg elastic 58, the crotch elastic 70 and possibly the elastic first section 44 can cooperate to form gathers 92 around the first leg opening 88. Likewise, the leg elastic 60, the crotch elastic 72, and possibly the elastic first section 44 can cooperate to form

gathers 94 around the second leg opening 90. It should be noted that the absorbent article 10 could be sold in either the flat, unassembled condition, as shown in Fig. 1, or in the assembled condition, as is shown in Fig. 11.

Referring again to Fig. 1, the back portion 14 of the disposable absorbent article 10 has been described with reference to a first section 44 and a second section 46. The first section 44 has a length L_2 and the second section 46 has a length L_3 , both measured parallel to the longitudinal central axis X—X. The combination of the length L_2 and the length L_3 equals a new length L_4 . The length L_4 should range from between about 3 inches (about 7.5 cm) to about 25 inches (about 64 cm). Preferably, for an adult size garment, the length L_4 should range from between about 7 inches to about 17 inches (about 18 cm to about 43 cm). Most preferably, for an adult size garment, the length L_4 should range from between about 10 inches to about 15 inches (about 25 cm to about 38 cm).

In addition, the absorbent article 10 has an overall length L_5 measured perpendicularly from the first end 22 of the front portion 12 to the first end 36 of the back portion 14. The length L_5 should range from between about 10 inches (about 25 cm) to about 45 inches (about 114 cm). Preferably, for an adult size garment, the length L_5 should range from between about 20 inches (about 51 cm) to about 40 inches (about 102 cm). Most preferably, for an adult size garment, the length L_5 should range from between about 30 inches (about 76 cm) to about 35 inches (about 89 cm).

A ratio L_4/L_5 can be established which ranges from between about 0.1 to about 0.5. Preferably, the ratio L_4/L_5 ranges from between about 0.2 to about 0.5 and more preferably, the ratio L_4/L_5 ranges from between about 0.3 to about 0.4. By designing and manufacturing the absorbent article 10 to fit within the values established for the ratio L_4/L_5 , one can be confident that the absorbent article 10 will exhibit improved body fit and be less likely to leak body fluid.

Referring now to Fig. 12, the back portion 14 of the refastenable disposable absorbent article 10 is depicted with the elastic 50 removed for clarity of discussion only. The back portion 14, as described above, has a first section 44 and a second section 46. The first section 44 has a length L_2 that is equal to or greater than about 2 inches (about 5 cm) and the second section 46 has a length L_3 that is equal to or greater than about 1 inch (about 2.5 cm). The second section 46 includes a first area A_1 and a second area A_2 . The first area A_1 is bounded by the second end 38, the line 48 drawn parallel to the first end 36, and the first and second side edges 62 and 64. In essence, the first area A_1 represents the total area of the second section 46. The second area A_2 is depicted as the cross hatched area bounded by first and second lines 96 and 98, the second end 38, and

the line 48 drawn parallel to the first end 36. The first and second lines 96 and 98 are drawn perpendicular to the second end 38 at points 100 and 102 where the first and second side edges 62 and 64 intersect the second end 38. The first and second lines 96 and 98 extend vertically upward and intersect the line 48 at points 104 and 106,

respectively. It has been found that if one divides the first area A_1 by the second area A_2 , a ratio A_1/A_2 is established. If this ratio A_1/A_2 is maintained within a certain limited range, one can manufacture a disposable absorbent article 10 that exhibits improved body fit in the buttocks region of the wearer. Such improved body fit reduces the likelihood of fluid leakage from occurring which is of utmost importance to a consumer of such products.

The first area A_1 should be equal to or greater than about 175 cm². Preferably, for an adult size garment, the first area A_1 ranges from between about 400 cm² to about 1500 cm². More preferably, for an adult size garment, the first area A_1 ranges from between about 500 cm² to about 1200 cm². Most preferably, for an adult size garment, the first area A_1 ranges from between about 600 cm² to about 1100 cm². The second area A_2 should be equal to or greater than about 135 cm². The ratio A_1/A_2 should range from between about 1.3 to about 3.5. Preferably, the ratio A_1/A_2 should range from between about 1.7 to about 2.5, and more preferably, the ratio A_1/A_2 should range from between about 2.0 to about 2.3.

It should be noted that the first and second lines 96 and 98 are aligned parallel to one another and are spaced apart a distance denoted as W_1 . W_1 represents the width of the second area A_2 . The width W_1 should be equal to or greater than about 4 inches (about 10 cm). Preferably, the width W_1 should range from between about 5 inches (about 13 cm) to about 15 inches (about 38 cm), and more preferably, the width W_1 should range from between about 6 inches (about 15 cm) to about 11 inches (about 28 cm). The dimension W_1 can vary depending upon the type and size of the absorbent article, as well as the age and physical size of the wearer that the absorbent article is designed to be worn by. If the absorbent article is sized to be worn by an infant, the dimension W_1 will be less than if the absorbent article was designed to be worn by a toddler or by an adult. The gender of the wearer can also affect the dimension W_1 .

Referring to Fig. 13, the back portion 14 and the crotch portion 16 of the absorbent article 10 are depicted with the elastic 50 removed from the back portion 14 for clarity of discussion only. The crotch portion 16 is joined at one end to the second end 38 of the back portion 14. The crotch portion 16 has first and second side edges 66 and 68 and first and second crotch elastics 70 and 72 positioned adjacent to the first and second side edges 66 and 68, respectively. The back portion 14 has a first section 44 and a second section 46. The first section 44 has a length L_2 that is equal to or greater than about

2 inches (about 5 cm) and the second section 70 has a length L_3 that is equal to or greater than about 1 inch (about 2.5 cm). The second section 46 includes a first area A_3 and a second area A_4 . The first area A_3 is bounded by the second end 38, the line 48 drawn parallel to the first end 36, and the first and second side edges 62 and 64. In essence, the first area A_3 represents the total area of the second section 46. The second area A_4 is depicted as the crosshatched area bounded by first and second lines 108 and 110, the second end 38, and the line 48 drawn parallel to the first end 36. The first and second lines 108 and 110 are drawn tangential to the first and second crotch elastics 70 and 72 at points 112 and 114 where the first and second crotch elastics 70 and 72 are spaced closest together. Another way of stating this is that the first and second lines 108 and 110, respectively, are aligned tangentially to the inner most elastic strand of each of the first and second crotch elastics 70 and 72. For a symmetrically shaped article 10, this will occur on the transverse central axis Y—Y.

The first and second lines 108 and 110 extend vertically upward toward the first end 36 and intersect both the second end 38 at points 116 and 118, and the line 48 drawn parallel to the first end 36 at points 120 and 122. The crosshatched area bounded by the points 116, 118, 120 and 122 represent the second area A_4 . It has been found that if one divides the first area A_3 by the second area A_4 , that a ratio A_3/A_4 is established. If this ratio A_3/A_4 is maintained within a certain limited range, one can manufacture an absorbent article that exhibits improved body fit in the buttocks region of the wearer. Such improved body fit reduces the likelihood of fluid leakage from occurring which is of utmost importance to a disposable absorbent article.

The first area A_3 should be equal to or greater than about 160 cm². Preferably, the first area A_3 should range from between about 400 cm² to about 1500 cm². More preferably, the first area A_3 should range from between about 500 cm² to about 1200 cm², and most preferably, the first area A_3 ranges from between about 600 cm² to about 1100 cm². The second area A_4 should be equal to or greater than about 105 cm². The ratio A_3/A_4 should range from between about 1.5 to about 5.0. Preferably, the ratio A_3/A_4 should range from between about 2.5 to about 4.0, and more preferably, the ratio A_3/A_4 should range from between about 3.0 to about 3.7.

It should be noted that the first and second lines 108 and 110 are aligned parallel to one another and are spaced apart a distance denoted as W_2 . W_2 represents the width of the second area A_4 . The width W_2 should be equal to or greater than about 2 inches (about 5 cm). Preferably, the width W_2 should range from between about 3 inches (about 8 cm) to about 7 inches (about 18 cm), and more preferably, the width W_2 should range from between about 4 inches (about 10 cm) to about 6 inches (about 15 cm). The

dimension W_2 can vary depending upon the type and size of absorbent article, as well as the age and physical size of the wearer that the absorbent article is designed to be worn by. If the absorbent article is sized to be worn by an infant, the dimension W_2 will be less than if the absorbent article was designed to be worn by a toddler or by an adult. The

5 gender of the wearer can also affect the dimension W_2 .

While the invention has been described in conjunction with several specific embodiments, it is to be understood that many alternatives, modifications and variations will be apparent to those skilled in the art in light of the foregoing description.

Accordingly, this invention is intended to embrace all such alternatives, modifications and
10 variations that fall within the spirit and scope of the appended claims.

We claim:

1. An absorbent article comprising:

- a) a front portion having a first end and a second end;
- b) a crotch portion joined at one end to said second end of said front portion, said crotch portion having first and second side edges, and first and second crotch elastics each positioned adjacent to one of said first and second side edges;
- c) a back portion joined to an opposite end of said crotch portion, said back portion having a first end, a second end, said back portion being divided into a first section and a second section, said first section being extendable in a transverse direction and having a length L_2 measured perpendicularly from said first end of said back portion to a line drawn parallel thereto, said length L_2 being equal to or greater than about 2 inches, and said second section having a length L_3 measured perpendicularly from said second end to said line drawn parallel to said first end, said length L_3 being equal to or greater than about 1 inch, said second section having a first side edge and a second side edge and a first area A_3 and a second area A_4 , said first area A_3 representing an area bounded by said first and second side edges, said second end and said line drawn parallel to said first end, said second area A_4 representing an area bounded by first and second lines, said second end and said line drawn parallel to said first end, said first and second lines being drawn tangential to said first and second crotch elastics at points where said first and second crotch elastics are spaced closest together, said first and second lines intersecting said second end and said line drawn parallel to said first end, and said second section having a ratio A_3/A_4 ranging from between about 1.5 to about 5.0;
- d) first and second fasteners secured to said back portion; and
- e) an absorbent secured to at least one of said front, back or crotch portions, and each of said first and second fasteners being releasably attached to said front portion to form a pant-like article having a waist opening and a pair of leg openings.

2. The absorbent article of claim 1 wherein said first section is elastic.

3. The absorbent article of claim 1 wherein said first section is constructed from an elastic material.
4. The absorbent article of claim 1 wherein said first section contains multiple elastic strands that extend transversely thereacross from a first side edge to a second side edge.
5. The absorbent article of claim 1 wherein said first section is capable of extending in the transverse direction by at least about 25%.
6. The absorbent article of claim 5 wherein said first section is capable of extending in the transverse direction by at least about 50%.
7. The absorbent article of claim 6 wherein said first section is capable of extending in the transverse direction by at least about 75%.
8. The absorbent article of claim 1 wherein at least one of said first and second fasteners is formed from a hook material that is releasably attached to said front portion which is formed from a loop material.
9. The absorbent article of claim 1 wherein at least one of said first and second fasteners is formed from a loop material that is releasably attached to said front portion which is formed from a hook material.
10. An absorbent article comprising:
 - a) a front portion having a first end and a second end;
 - b) a crotch portion joined at one end to said second end of said front portion, said crotch portion having first and second side edges, and first and second crotch elastics each positioned adjacent to one of said first and second side edges;
 - c) a back portion joined to an opposite end of said crotch portion, said back portion having a first end, a second end, said back portion being divided into a first section and a second section, said first section being extendable in a transverse direction and having a length L_2 measured perpendicularly from said first end of said back portion to a line drawn parallel thereto, said length L_2 being equal to or greater than about 2 inches, and said second

15 section having a length L_3 measured perpendicularly from said second end
to said line drawn parallel to said first end, said length L_3 being equal to or
greater than about 1 inch, said second section having a first side edge and
a second side edge and a first area A_3 and a second area A_4 , said first area
20 A_3 representing an area bounded by said first and second side edges, said
second end and said line drawn parallel to said first end, said second area
 A_4 representing an area bounded by first and second lines, said second
end and said line drawn parallel to said first end, said first and second lines
being drawn tangential to said first and second crotch elastics at points
25 where said first and second crotch elastics are spaced closest together,
said first and second lines intersecting said second end and said line drawn
parallel to said first end, and said second section having a ratio A_3/A_4
ranging from between about 2.5 to about 4.0;
d) first and second fasteners secured to said first section;
e) a liquid permeable liner secured to at least one of said front, back or crotch
portions; and
f) an absorbent positioned below said liner, and each of said first and second
30 fasteners being releasably attached to said front portion to form a pant-like
article having a waist opening and a pair of leg openings.

11. The absorbent article of claim 10 wherein said first section is elastic.
12. The absorbent article of claim 10 wherein at least one of said first and second fasteners is formed from a hook material that is releasably attached to said front portion which is formed from a loop material.
13. The absorbent article of claim 10 wherein at least one of said first and second fasteners is formed from a loop material that is releasably attached to said front portion which is formed from a hook material.
14. The absorbent article of claim 10 wherein said first section contains multiple elastic strands that extend transversely thereacross from said first side edge to said second side edge, and said first section is capable of extending in the transverse direction by at least about 25%.

15. An absorbent article comprising:

- a) a front portion having a first end and a second end;
- b) a crotch portion joined at one end to said second end of said front portion, said crotch portion having first and second side edges, and first and second crotch elastics each positioned adjacent to one of said first and second side edges;
- c) a back portion joined to an opposite end of said crotch portion, said back portion having a first end, a second end, said back portion being divided into a first section and a second section, said first section being extendable in a transverse direction and having a length L_2 measured perpendicularly from said first end of said back portion to a line drawn parallel thereto, said length L_2 being equal to or greater than about 2 inches, and said second section having a length L_3 measured perpendicularly from said second end to said line drawn parallel to said first end, said length L_3 being equal to or greater than about 1 inch, said second section having a first side edge and a second side edge and a first area A_3 and a second area A_4 , said first area A_3 representing an area bounded by said first and second side edges, said second end and said line drawn parallel to said first end, said first area A_3 being equal to or greater than about 160 cm², said second area A_4 representing an area bounded by first and second lines, said second end and said line drawn parallel to said first end, said first and second lines being drawn tangential to said first and second crotch elastics at points where said first and second crotch elastics are spaced closest together, said first and second lines intersecting said second end and said line drawn parallel to said first end, and said second section having a ratio A_3/A_4 ranging from between about 3.0 to about 3.7;
- d) first and second fasteners secured to said first section;
- e) a liquid permeable liner secured to at least one of said front, back or crotch portions; and
- d) an absorbent positioned below said liner, and each of said first and second fasteners being releasably attached to said front portion to form a pant-like article having a waist opening and a pair of leg openings.

16. The absorbent article of claim 15 wherein A_3 ranges from between about 400 cm² to about 1500 cm².

17. The absorbent article of claim 15 wherein at least one of said first and second fasteners is formed from a hook material that is releasably attached to said front portion which is formed from a loop material.
18. The absorbent article of claim 15 wherein at least one of said first and second fasteners is formed from a loop material that is releasably attached to said front portion which is formed from a hook material.
19. The absorbent article of claim 15 wherein said first section contains multiple elastic strands that extend transversely thereacross from said first side edge to said second side edge, and said first section is capable of extending in the transverse direction by at least about 25%.
20. The absorbent article of claim 15 wherein first section is capable of extending in the transverse direction by at least about 50%.

1/5

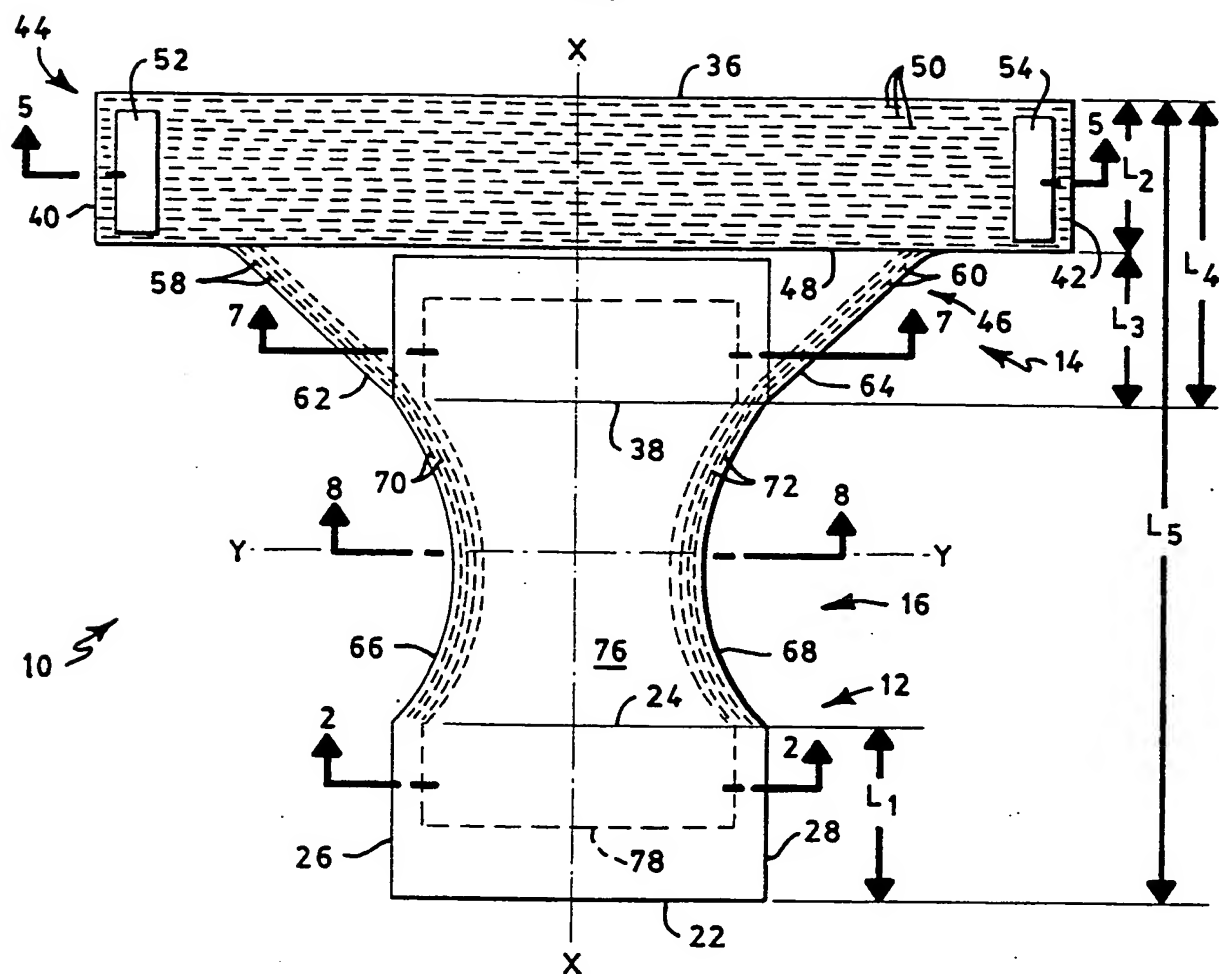


FIG. 1

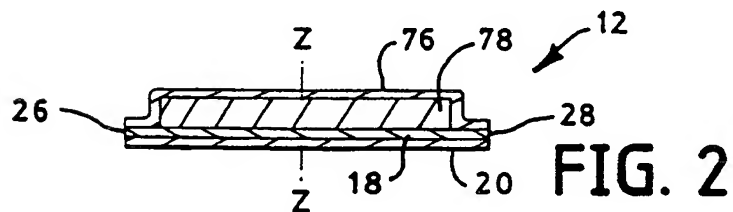


FIG. 2

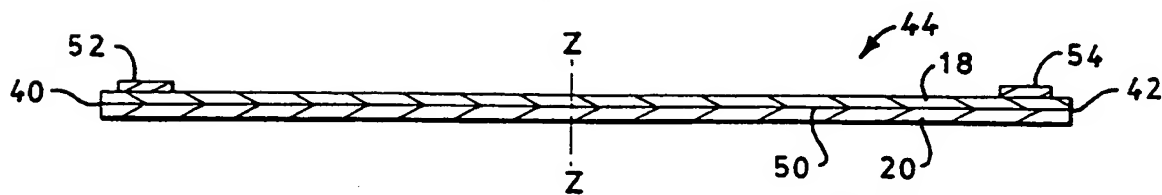


FIG. 5

2/5

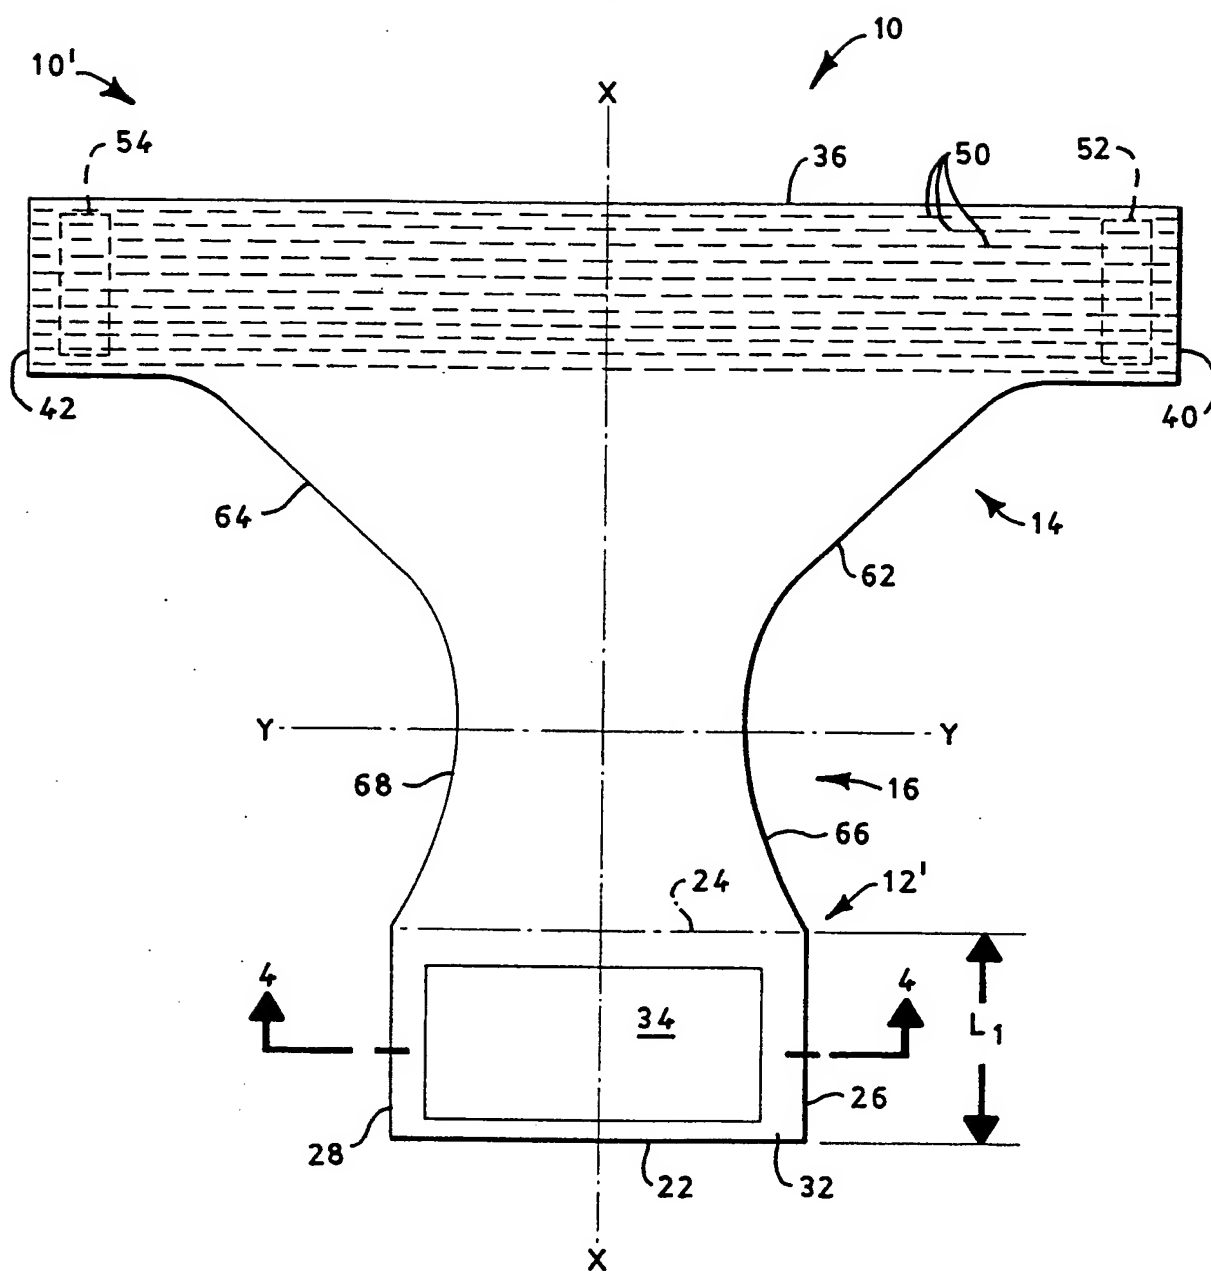


FIG. 3

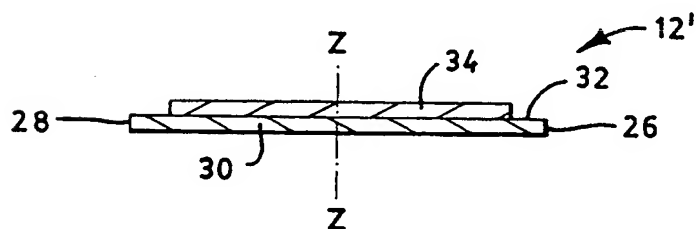


FIG. 4

3/5

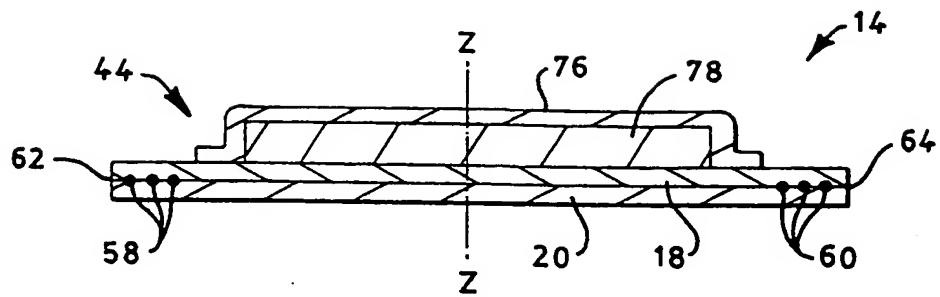


FIG. 7

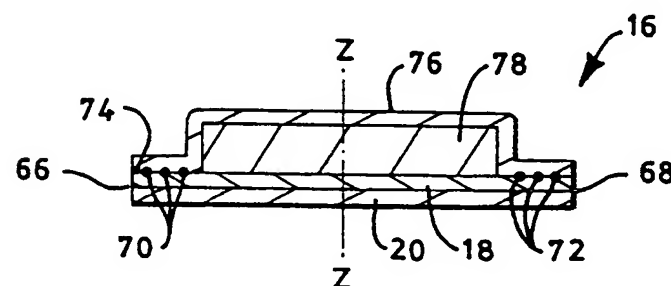


FIG. 8

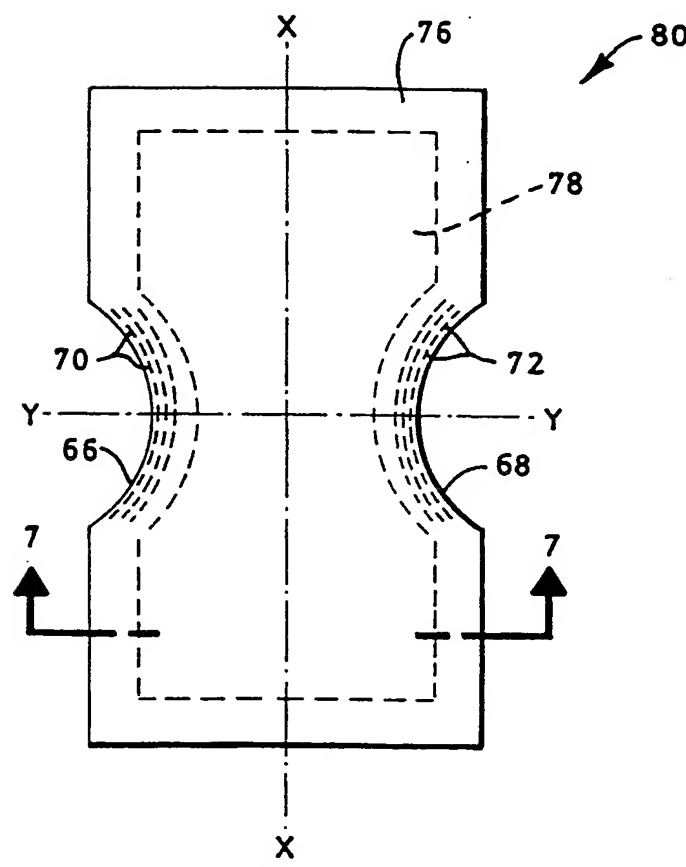


FIG. 9

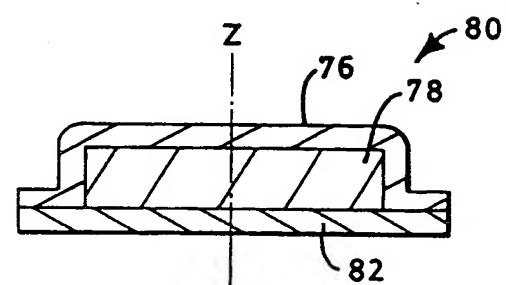


FIG. 10

4/5

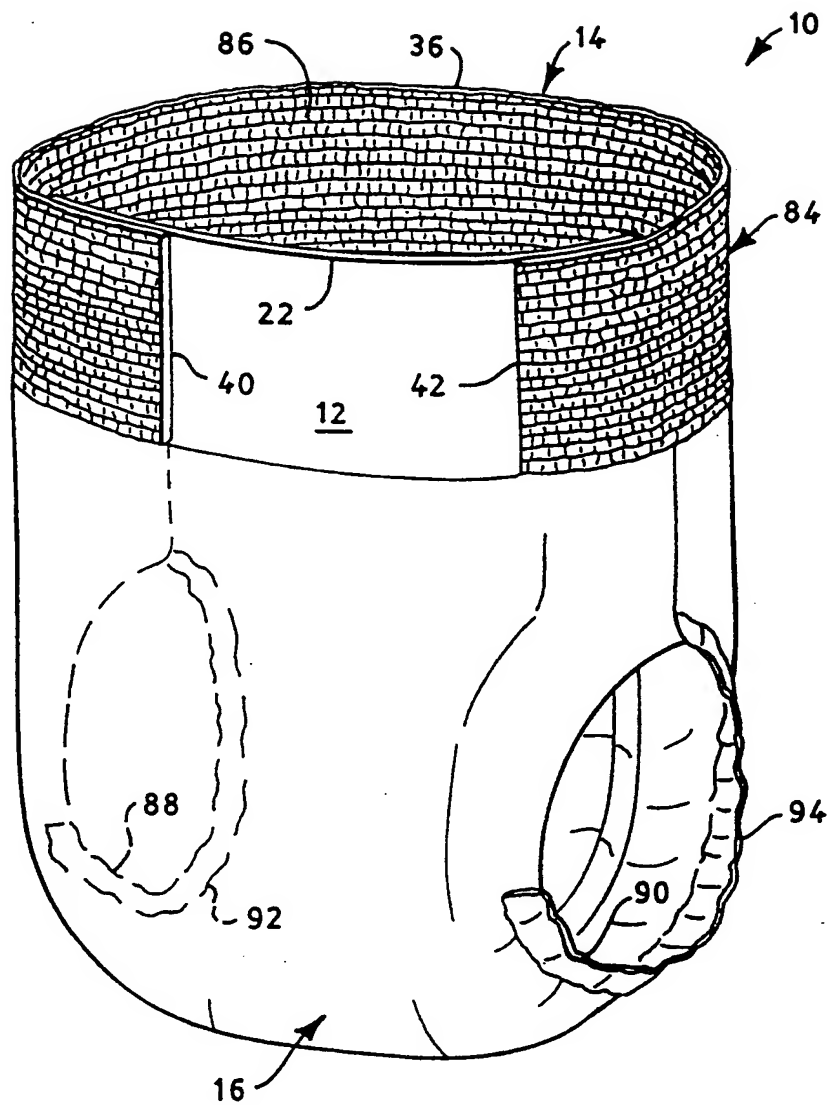


FIG. 11

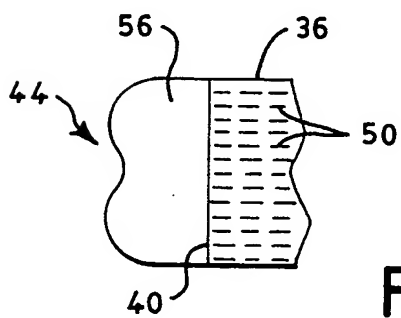


FIG. 6

5/5

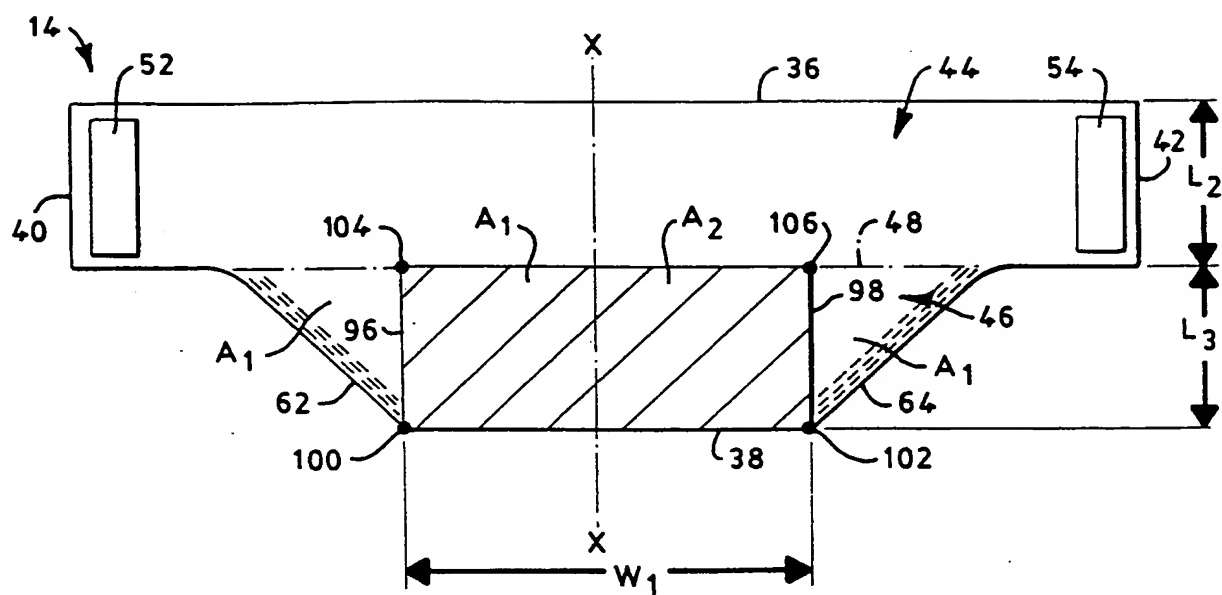


FIG. 12

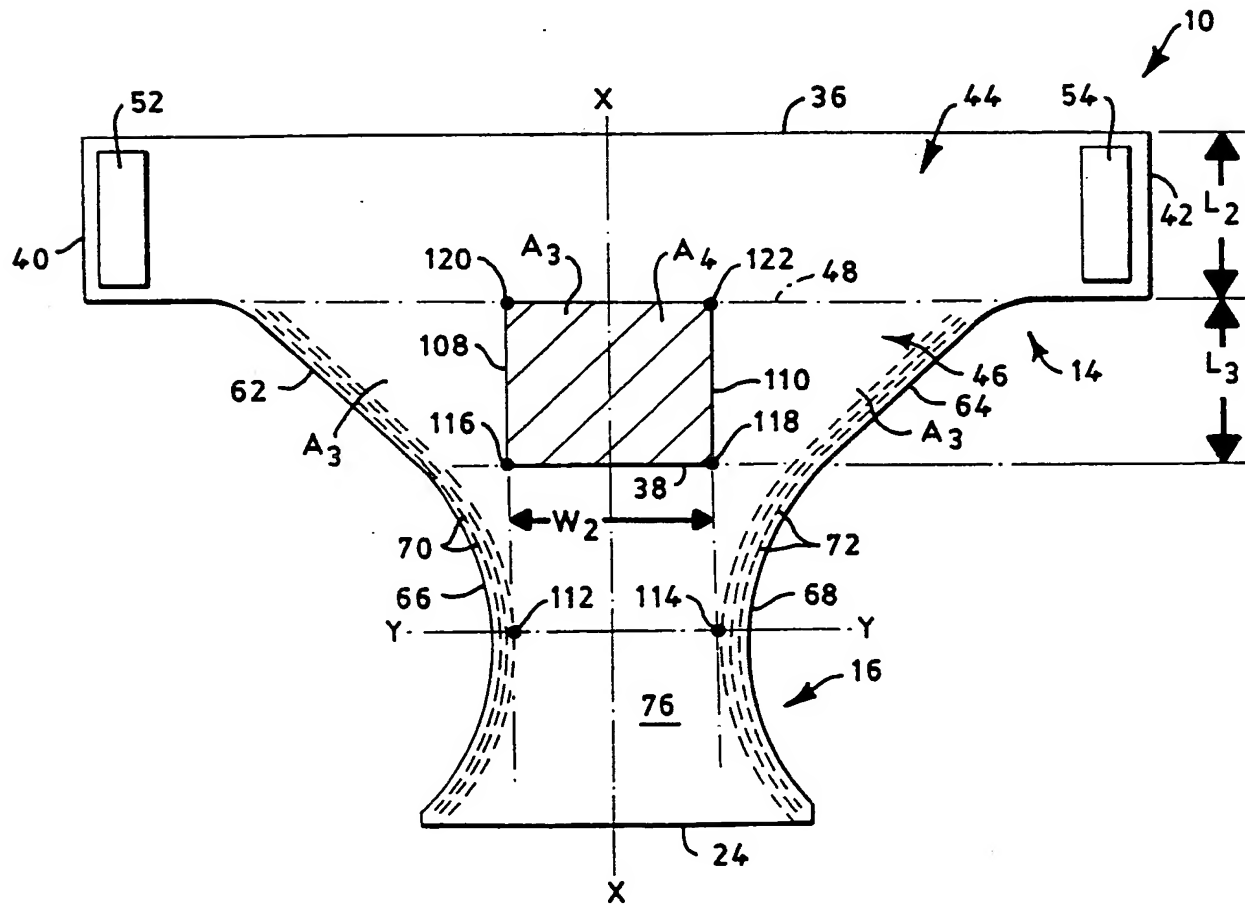


FIG. 13

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/23091

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A61F13/15

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 906 243 A (DRAVLAND MARY) 6 March 1990 (1990-03-06) the whole document	1-3, 10, 11, 15
A	GB 2 244 422 A (KAO CORP) 4 December 1991 (1991-12-04) claims; figures 7-11	1-20
Y	GB 2 294 865 A (MOELNLYCKE AB) 15 May 1996 (1996-05-15) claims; figures	1-8, 10-12, 14-17, 19, 20

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

* & * document member of the same patent family

Date of the actual completion of the international search

14 November 2000

Date of mailing of the international search report

27/11/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Mirza, A

INTERNATIONAL SEARCH REPORT

Intern: al Application No

PCT/US 00/23091

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 450 541 A (KIMBERLY CLARK CO) 9 October 1991 (1991-10-09) column 5, line 5 - line 24 column 15, line 46 -column 16, line 55; figures 15-17	1-8, 10-12, 14-17, 19,20
A	EP 0 412 579 A (KIMBERLY CLARK CO) 13 February 1991 (1991-02-13) claims; figures	1-20

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US 00/23091

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4906243	A	06-03-1990	NONE	
GB 2244422	A	04-12-1991	JP 3015067 B JP 4035663 A HK 105994 A US 5370634 A	28-02-2000 06-02-1992 14-10-1994 06-12-1994
GB 2294865	A	15-05-1996	SE 509063 C AU 697312 B AU 3885595 A DE 69518854 D EP 0790816 A JP 10508519 T NZ 295501 A PL 319950 A SE 9403832 A WO 9614039 A SK 52597 A TR 960392 A ZA 9509387 A	30-11-1998 01-10-1998 31-05-1996 19-10-2000 27-08-1997 25-08-1998 24-09-1998 01-09-1997 09-05-1996 17-05-1996 08-10-1997 21-06-1996 28-05-1996
EP 0450541	A	09-10-1991	AU 639767 B AU 7397391 A CA 2019457 A JP 7075652 A KR 168641 B MX 172327 B US 5411498 A	05-08-1993 03-10-1991 02-10-1991 20-03-1995 15-01-1999 13-12-1993 02-05-1995
EP 0412579	A	13-02-1991	AU 585643 B AU 6233386 A CA 1308865 A CA 1330148 A DE 3682350 A DE 3689908 D DE 3689908 T EP 0214636 A JP 2055837 C JP 7090032 B JP 62162002 A KR 9107954 B MX 168736 B US 4850990 A	22-06-1989 12-03-1987 20-10-1992 14-06-1994 12-12-1991 14-07-1994 08-12-1994 18-03-1987 23-05-1996 04-10-1995 17-07-1987 04-10-1991 07-06-1993 25-07-1989